





Terminal Blocks

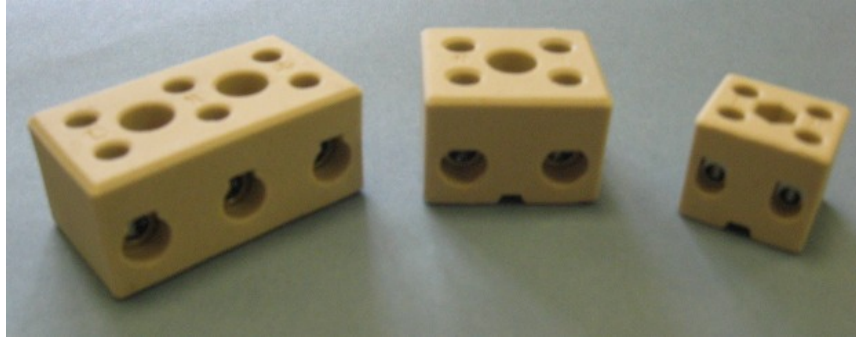

- Housing: Glazed porcelain - C 111, IEC 672-1
- Continuous use Temperature: max. 350 °C
- Insert: nickel-plated brass (galvanised)
- Screw: zinc-plated steel (galvanised), blue passivated, screwed down as far as possible

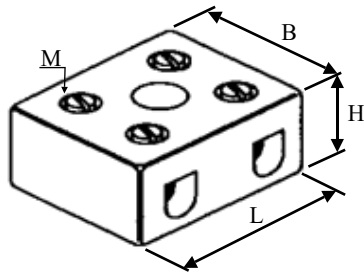

Type	Pole	Voltage	Clamping Area	Current	L mm	B mm	H mm	M
2-1602-2/ST	2	450V	2.5-16mm ²	32A	24	22	20	M3,5
2-2021-2/ST	2	450V	2.5-16mm ²	57A	34	30	23	M4
2-2031-3/ST	3	450V	2.5-16mm ²	57A	52	30	23	M4