




Screw Plug Immersion Heaters



- Elements: Incoloy 800
 - Flange: 2 1/4" BSP Brass
 - Thermostat: Rod thermostat (to be wired to remote contactor).
 - Terminal Box: IP65 Manufactured from Polyamide and fibreglass
Can be rotated through 360°
 - Cable Entries: 2 - PG11 and PG16
 - Pressure tested: 6 Bars
 - Gasket: Supplied with each heater, NBR and cellulose fibre.
- Purpose designed screw plug immersion heaters with specified crew plug sizes can be supplied.

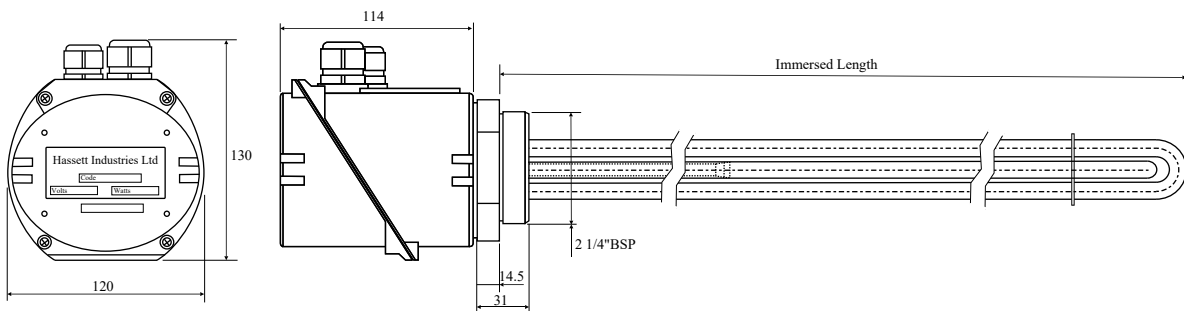

Rating kW	Immersed length (mm)	Watts/cm ²	Element Diameter (mm)
3	257	10	8.5
6	445	10	8.5
9	632	10	8.5
12	760	10	10
15	865	10	10
18	1025	10	10